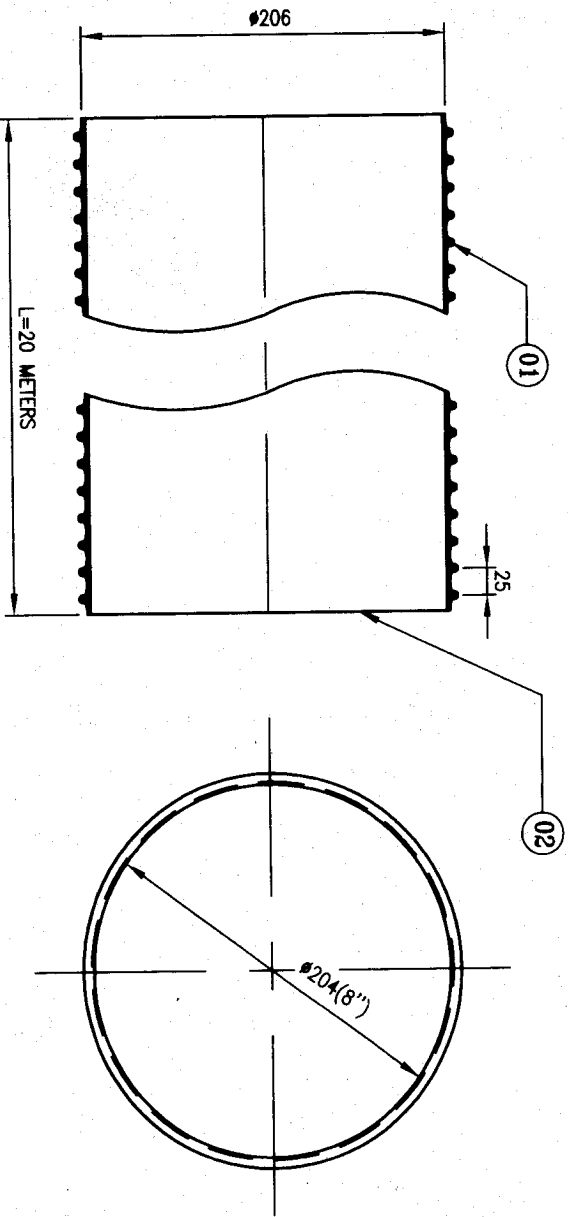


1	2	3	4
REV.	NO. OF PLACES	CHANGE/ECN NO.	SIGNATURE & DATE
			REVISED
			APPROVED

**NOTE:**

1. The supplied hose should with stand temperature of about 100° C and pressure around 10 bar.
2. Base material is Transparent Polyurethane.
3. Length of the pipe should be 20 meters.


SL. NO.	PART NO.	NAME OF PART	QTY./ ASSLY.	MATERIAL	REMARKS	APPLICATION	QTY.
02	--	HOSE	--	TRANSPARENT POLYURETHANE	t=1mm		
01	--	WIRE	--	STEEL	DA=2mm		

General Tolerance To SKES-04-052-0 Remove all burrs and break sharp edges. Unspecified finish

All dimensions are in mm,
Unless specified.
Do not scale the drawing.
If in doubt, ask.

DESIGN REF.

SIGNATURE DATE

TITLE
FLEXIBLE AIR HOSE 8"SURF. TREATMENT
---SIZE
A4 SCALE
NTSAPPROVED
REVIEWED/CHECKED
DESIGNED/DRAWNBharat Earth Movers Ltd.,
Engine Division,
Mysore.SHEET
1
1DRG. NO.
00N 999 0556