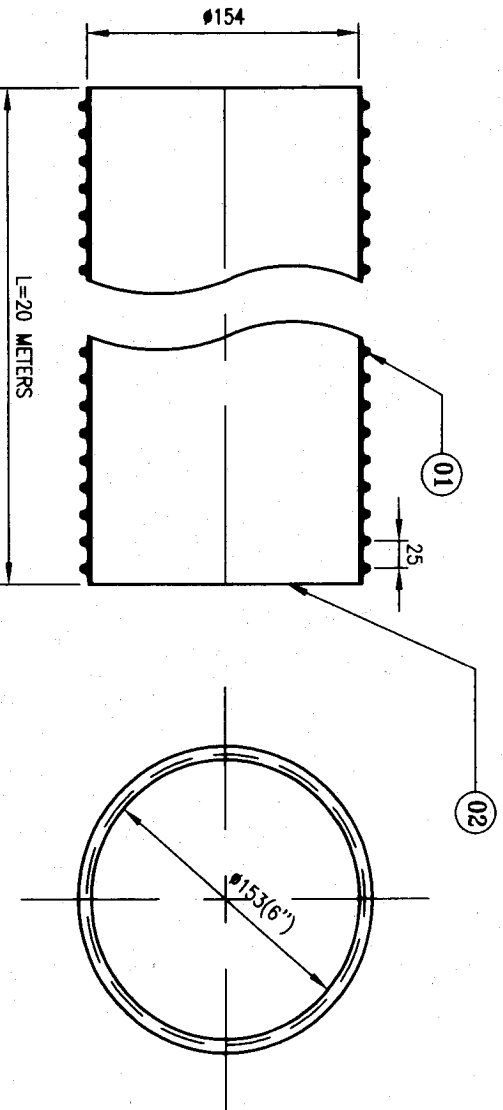


1	2	3	4
REV.	NO. OF PLACES	CHANGE/ECN NO.	SIGNATURE & DATE
			REVISED
			APPROVED

**NOTE:**

1. The supplied hose should with stand temperature of about 100° C and pressure around 10 bar.
2. Base material is Transparent Polyurethane.
3. Length of the pipe should be 20 meters.

02		---	HOSE	---	TRANSPARENT POLYURETHANE	t=1mm		
01	---	WIRE	---	STEEL	DA=1.5mm			
SL. NO.	PART NO.	NAME OF PART	QTY./ ASSLY.	MATERIAL	REMARKS	APPLICATION	QTY.	
General Tolerance To SKES-04-052-0						Remove all burrs and break sharp edges.		
All dimensions are in mm, Unless specified. Do not scale the drawing. If in doubt, ask.						Unspecified finish		
DESIGN REF.						SURF. TREATMENT		
APPROVED						SIGNATURE		
REVIEWED/CHECKED						DATE		
DESIGNED/DRAWN						DATE		
TITLE						FLEXIBLE AIR HOSE (6")		
MATERIAL						SEE DWG		
WT. of part (Kgs.)						PORTION		
CASE DEPTH						SIZE		
SCALE						A4		
SURF. TREATMENT						NTS		
Bharat Earth Movers Ltd., Engine Division, Mysore.						SHEET 1/1		
DRG. NO. 00N 999 0564						SCALE		