








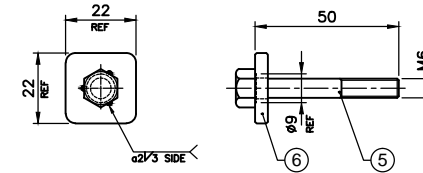


GRADE No.	N12	N11	N10	N9	N8	N7	N6	N5	N4	N3	N2	N1	
VALUE	50/	25/	12.5/	6.3/	3.2/	1.6/	0.8/	0.4/	0.2/	0.1/	0.05/	0.025/	
SYMBOL													

UNCONTROLLED

NOTE:

1. REMOVE ALL SHARP EDGES
2. FOR CLEATS Min TENSILE STRENGTH: 65 N/mm²
3. BURNING RESISTANCE : SELF EXTINGUISH.
4. ITEM-1&7 SHALL CONFIRM TO EN45545-HL-3

CLEAT ASSY,
PG9x2xPG21

ppd vs  **beml** **BEML LIMITED**
NEW FRONTIERS. NEW DREAMS

525-56150