

BL14TH

TYRE HANDLER

Salient Features :

- Turbo charged sturdy engine
- Electronic Transmission
- Articulated power steering
- Limited slip differential
- Center point articulation
- To carry a tyre size from 18x25 to 36x51



Tyre Lifting Capacity	: 3500 kg
Operating Mass	: 21,500 kg

BL14TH

TYRE HANDLER

Salient Features :

Sturdy direct injection type, turbo charged BEML Diesel Engine for sustained power and fuel economy.

Articulated power steering for higher maneuverability and faster cycles.

Limited slip differential front and rear axles for positive traction while loading.

Rear axle oscillation offers stability to the machine on rough and uneven terrains.

Centre point articulation for safer steering operation.

Neutral starter switch in the circuit to avoid engine starting when transmission gear shift lever is not in neutral.

Continuous rotation of the gripping pads.

Smooth rotation of the Head assembly.

Upto 1,91,334 N of gripping force on the tyre.

Lateral carriage movement of 200 mm for precision side shift alignment.

Optimum operator control and visibility.

A complete range of large off-the-road tyre handling capabilities.

All wheel drive and the articulating features of the carrier vehicle.



ENGINE

Make	BEML LTD.
Model	BS6D105-1
Type	Water cooled 4 cycle, over head valve, direct injection type, turbo charged diesel engine.
No. of Cylinders	6
Bore & Stroke	ø 105 x 125 mm
Displacement	6.5 l (6,499 cc)

HORSE POWER

Rated BHP	110 kW(148 HP) @ 2000 rpm
Flywheel power	94 kW(126 HP) @ 2000 rpm
Maximum torque	565 Nm (58kgm) @ 1400 rpm

FUEL SYSTEM

Type	BOSCH type, MICO FIP system
Governor	Mechanical, all speed control

LUBRICATION SYSTEM

Method	Gear pump, forced lubrication
Cooler	Water cooled

ELECTRICALS

Starting method	Electric
Starting motor	24V, 4.5 kW
Alternator	24V, 45A
Battery	24V (2 x 12V), 150 Ah



COOLING SYSTEM

Radiator	Continuous finned flat tube de-aeration type tank
Pump	Centrifugal pump
Fan	Blower type
Air cleaner Type	Dry, 2-stage, horizontal
Air compressor capacity	160 CC



TRANSMISSION

Torque Converter

Model	W340
Type	Hydrodynamic
Stall ratio	3.095 : 1

Transmission

Model	4WG190 ERGO POWER
Type	Rear mounted multi speed power shift electronic control transmission with four forward & three reverse speeds
Controls	Manual Range Selector



BRAKES

Service brakes	Wet multiple disc type. Air over Hydraulic actuated.
Parking brake	Disc type, spring applied and hydraulic released operating pressure @ 126 kg/cm ² .

STANDARD EQUIPMENT

Ammeter, Air pressure gauge, Engine oil pressure gauge, Transmission oil temperature gauge, Engine Hour meter, Engine water temperature gauge, Head lights and rear lights, Horn, Starter key switch, Alternator, Regulator, Batteries, Foot throttle, Fenders, Canopy, Tool box, Fire extinguisher 2kg, Reverse light and alarm, Side indicator lamp, Battery charging indicator, High beam indicator, Parking brake applied indicator, Low air pressure warning.



HYDRAULICS SYSTEM

Pump Type	Vane Pump
Capacity	272 l/min
Relief Pressure	13.73 MPa (140 kg/cm ²)
Control Valve Type	Double spool type
Positions	
Lift System	Raise, Hold and Lower
Dump System	Roll back, hold and dump
Lift Cylinders	
Type	Double acting
No. of Cylinders	2
Bore x Stroke	∅ 150 x 860 mm
Dump Cylinder	
Type	Double acting
No. of Cylinders	1
Bore x Stroke	∅ 160 x 410 mm



AXLES & FINAL DRIVE

Axles	
Type	Front axle is fixed, and Rear axle oscillates up or down by 10°, (total 20°)
Final Drive	
Type	Four wheel drive full floating with planetary reduction in each wheel.

Travel Speeds	
Forward km/h (m/s)	Reverse km/h (m/s)
1st 6.28 (1.74)	1st 6.61 (1.84)
2nd 11.66 (3.24)	2nd 12.24 (3.4)
3rd 21.43 (5.95)	3rd 22.34 (6.2)
4th 31.4 (8.72)	---



TYRES

Tyres	
Standard	23.5 x 25 ~ 20 PR Tube less (Filled with liquid ballast)
Rims	
Type	Flange type
Size	19.50 x 25
Max. gradeability	25% (~14°)




STEERING SYSTEM

Type	Articulated, full power steering 25° on either side
Steering Pump	
Type	Vane Pump
Flow	272 l/min @ 2000 rpm
Relief valve setting pressure	17.61 MPa (175 kg/cm ²)
Steering cylinder	
Type	Double acting
No. of cylinders	2
Bore x Stroke	∅ 90 x 535 mm
Turning radius	7200 mm



DIMENSIONS

Overall length	8360 mm
----------------	---------

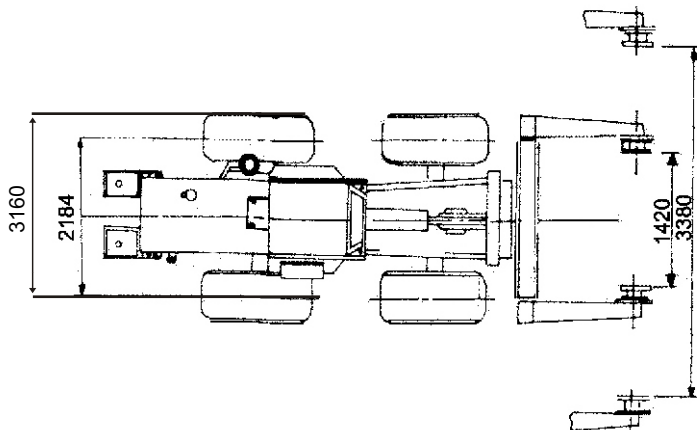

SERVICE CAPACITIES

System	(litres)
Cooling system	45
Fuel Tank	185
Engine	25
Transmission (inclusive of drop box)	27
Front axle	35
Rear axle	35
Brake oil tank	2.8
Hydraulic tank	195



FILTRATION

Engine	Replaceable micro paper element filter for lubrication as well as for fuel line is provided.
Transmission	Replaceable element type of filter is provided.
Hydraulic System	Magnetic plug and replaceable element type filter is provided.



TECHNICAL DATA

Capacity	To carry a tyre mounted on rim weighing upto 3500 kg. Tyre sizes from 18.00 x 25 to 36.00 x 51.
Clamping span	1420 mm to 3380 mm
Hand Axial Rotation	360° continuous
Lateral Rotation	350°
Clamping pads	610 mm round cups with grip lugs
Lateral rotation speeds	20 ~ 30 seconds
Axial rotation speed	10 seconds
Clamping action	Independently controlled
Clamping Safety	
Lock	Safety check valves on clamping side of cylinder
Clamping force	19504 kg
Side shift action	200 mm total, 100 mm each side of centre line
Lift Height	3200 mm



TYRE HANDLER HYDRAULIC SYSTEM

Pump type	Vane Type
Capacity	50 litres / min
Relief Pressure	175 kg/cm ²
Hydraulic control	Five spool control valve having a flow rate of 50 litres/min with a relief setting of 175 kg/cm ² . The oil to the control valve is supplied by carrier vehicle hydraulic system / auxiliary hydraulic system.




COUNTER WIEHGT

Counter Weight:	Rear mounted counter weight weighing 3000 kgs and tyres filled with 75% Cacl ₂ or water.
-----------------	---



OPERATING MASS

Operating mass	21,500 kg approx.
----------------	-------------------

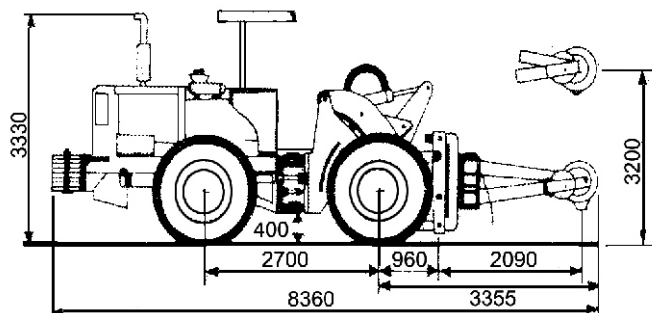

Material and specifications are subject to change without notice, Illustrations may include optional equipment & accessories

Business Network

Corporate Office

BEML Soudha, 23/1, 4th Main,
S.R. Nagar, Bangalore-560 027

T + 91 80 22963240, 22963250

F + 91 80 22963278/516/280/164

E-mail: office@cpd.beml.co.in
office@pr.beml.co.in

International Business Division

BEML Soudha, 23/1, 4th Main,
S.R. Nagar, Bangalore-560 027

T + 91 80 22222730, 22233350
22963187, 22963215

F + 91 80 22224874

E-mail: office@export.beml.co.in

Marketing Division

5th Floor, Unity Building,
J.C. Road, Bangalore-560 002

T + 91 80 22963501/02/07/510/553

F + 91 80 22963541

E-mail: m@beml.co.in
bemldealer@dealer.beml.co.in

Global Service HQ

C-6, Central Hingna Road,
MIDC Industrial Area, Hingna,
Nagpur-440 028

T + 91 7104 287097/287098

F + 91 7104 287099

E-mail: ss.servicehq@gmail.com
ss@servicehq.beml.co.in

REGIONAL OFFICES

Bilaspur

1/A, Sector-C, Sirgitti Industrial Area,
P.O: Tifra, Bilaspur - 495 223.
Chhattisgarh.

T + 91 7752 252745, 252598
F + 91 7752 252065
E-mail: bilaspur@rm.beml.co.in

Chennai

Flat No. 10&11, Supriya Estates,
Sterling Road, Nungambakkam,
Chennai - 600 034, Tamil Nadu

T + 91 44 28276576 / 28220844
F + 91 44 28257319
E-mail: chennai@rm.beml.co.in

Dhanbad

Kamal Kunj, Kola Kusuma,
Saraidhela, Dhanbad - 828 127
Jharkhand

T + 91 326 2200180 / 2208982/5827
F + 91 326 2200182
E-mail: dhanbad@rm.beml.co.in

Hyderabad

3-6-114, Himayat Nagar,
Hyderabad - 500 029
Andhra Pradesh

T + 91 40 23225250 / 7032 / 2166
F + 91 40 23221794
E-mail: hyderabad@rm.beml.co.in

Kolkata

35/1, Taratalla Road,
Kolkata - 700 088.
West Bengal

T + 91 33 24015286 / 87 / 98 / 99
F + 91 33 24015288
E-mail: kolkata@rm.beml.co.in

Mumbai

Rajmahal, 84 Veer Nariman Road,
Church Gate,
Mumbai - 400 020, Maharashtra

T + 91 22 22042533 / 22049490
F + 91 22 22852633
E-mail: mumbai@rm.beml.co.in

Nagpur

33, Cement Road,
Shivaji Nagar,
Nagpur - 440 010, Maharashtra

T + 91 0712 2248435 / 2248343
F + 91 0712 2249997
E-mail: nagpur@rm.beml.co.in

New Delhi

Flat EFGH, 'Vandana', 11th Floor,
Tolstoy Marg,
New Delhi - 110 001

T + 91 11 23310035 / 23316500
F + 91 11 23325085
E-mail: delhi@rm.beml.co.in

Ranchi

206/D-1, Bhagirathi, (Behind NCC Campus),
Rameshwaram Colony, Bariatu Road,
Ranchi, Jharkhand - 834009

T + 91 651 2540710 / 2540791
F + 91 651 2540624
E-mail: ranchi@rm.beml.co.in

Sambalpur

BEML Complex, NH-6, Barapalli,
Sambalpur - 768 150
Orissa.

T + 91 663 2521604 / 2520393
F + 91 663 2521603
E-mail: sambalpur@rm.beml.co.in

Singrauli

PB No. 5, Jhingurda Colliery,
Sidhi, Singrauli - 486 889
Madhya Pradesh.

T + 91 7805 268260 / 266668
F + 91 7805 267282 / 318
E-mail: singrauli@rm.beml.co.in

Www.bemlindia.com

Represented by :



DISTRICT OFFICES

Ahmedabad

266-1, Dilbaug Villa,
Darshan Society Road, Navrangpura,
Ahmedabad - 380 009. Gujarat

T + 91 79 26445523
F + 91 79 26423950
E-mail: ahmedabad@rm.beml.co.in

Asansol

3, Burnpur Road,
Asansol - 713 304
West Bengal

T + 91 341 2252480
F + 91 341 2250601
E-mail: asansol@rm.beml.co.in

Bacheli

Behind Central Stores
of NMDC Ltd., Depot 5, Bacheli - 494 553.
Chhattisgarh

T + 91 7857 200518
F + 91 7857 230005
E-mail: bacheli@rm.beml.co.in

Bhilai

Room No. 22/C, BSP Building,
Near Ispat Bhavan, Bhilai - 490 001
Chhattisgarh.

T + 91 788 2223882, 2894721
F + 91 788 2221652
E-mail: bhilai@rm.beml.co.in

Bhopal

Ground Floor, Hall No.1, Chittod Complex
Zone-1, Maharanapratap Nagar (MP Nagar)
Bhopal - 462 023

T + 91 755 2550711
E-mail: bemlbhopal@gmail.com

Bhubaneswar

252/A, LEWIS Road,
Bhubaneswar - 751 014
Orissa

T + 91 674 2434428
T/F + 91 674 2434427
E-mail: bhubaneswar@rm.beml.co.in

Chandrapur

Mamidwar, Tiles Factory Compound,
Ghugus Road, Padoli,
Chandrapur - 442 406 Maharashtra

T + 91 7172 287230
F + 91 7172 287072
E-mail: chandrapur@rm.beml.co.in

Cochin

No. 55/845, Chittor Road, Ernakulam South
Cochin-682 016

T + 91 484 2375138
E-mail: bemlkochi@gmail.com

Guwahati

Hegrabari Road, House No. 11,
Ganesh Puri, Dispur,
Guwahati - 781 006 Assam

T + 91 361 2232966
F + 91 361 2232967
E-mail: guwahati@rm.beml.co.in

Hospet

L-8, KSSIDC Industrial Area,
Dam Road, Hospet - 583 203
Karnataka

T + 91 8394 223173
F + 91 8394 230172
E-mail: hospet@rm.beml.co.in

Jammu

62C, Block D/C, Gandhi Nagar,
Jammu tawi - 180 004
Jammu and Kashmir

T + 91 191 2430447
F + 91 191 2477469
E-mail: jammu@rm.beml.co.in

Kothagudem

Old Project Planning Department,
Near SCCL Corporate Office,
Kothagudem - 507 101, Andhra Pradesh

T + 91 8744 245572
F + 91 8744 245530
E-mail: kothagudem@rm.beml.co.in

Madurai

9-4/49, Kalai Nagar, Ind Main Road,
Madurai - 625 017, Tamil Nadu.

T/F + 91 452 2649458
E-mail: madurai@rm.beml.co.in

Neyveli

F-4, Rajendraprasad Road, Block-27
Neyveli - 607 803. Tamil Nadu

T/F + 91 4142 268517
E-mail: neyveli@rm.beml.co.in

Panjim

67-12, Dattaprasad Building, III Floor, MG Road,
Timphoni School, Panjim - 403 001. Goa

T/F 91 832 2225135
E-mail: goa@rm.beml.co.in

Ramagundam

Opp. SCCL 11A Mines, Manthani,
(PO) Jallaram, GK - 505 184
Karimnagar Dt. Andhra Pradesh

T + 91 8728 248299
F + 91 8728 247423
E-mail: ramagundam@rm.beml.co.in

Udaipur

20-B, Uchhab Bhawan, Bedia Road,
Fatehpura, Udaipur - 313 004.
Rajasthan

T + 91 294 2452053, 2452055
F + 91 294 2452054
E-mail: udaipur@rm.beml.co.in

Visakhapatnam

No. 8-45-11, 4h Lane, China Weltair Colony,
Visakhapatnam - 530 003

T/F 0891 2754608
E-mail: vizag@rm.beml.co.in

बी ई एम एल लिमिटेड

BEML LIMITED

A Govt. of India Miniratna Company Under Ministry of Defence