

BL40

FRONT END LOADER

- High Productivity
- Increased Reliability
- Exceptional Manoeuvrability
- Excellent Serviceability & Easy Maintenance
- Superior Operating Comfort



BL40

Bucket capacity : 4.7 cu.m.

Operating mass : 28,000 kg

Net power : 224 kW (300 fhp) at 2100 rpm

BL40

FRONT END LOADER

Salient Features :

Productivity :

High power BEML BS6D140-1 engine, rugged electric shift transmission featuring three-forward and three-reverse speeds with heavy duty planetary axle for high tractive effort and gradability in all operating conditions.

Reliability :

Maintenance-free wet multiple disc brakes at rear and front axle, box-type chassis construction for uniform stress distribution Z - bar linkage assures optimum breakout force and faster cycle time.

Manoeuvrability :

Centre - point articulation with power steering, optimum combination of travel speed and hydraulic cycle time, turning circle and wheel base.

Serviceability & Maintainability :

Electronic display and monitoring system helps prevent minor problems from becoming major ones, Sealed loader linkage pins account for higher performance and less maintenance.

Comfort :

Spacious cab, with ergonomically arranged, manually operated control lever for speeds in forward / reverse selection, air suspension, adjustable seat. Excellent visibility ensures easy loading on dump trucks.



ENGINE

Make	BEML
Model	BS6D140-1
Type	Diesel, 4-cycle, water-cooled direct injection
Aspiration	Turbocharged
Number of Cylinders	6
Bore & Stroke	∅ 140 x 165 mm
Piston displacement	15.2 ltrs.
Compression ratio	15.0:1
Net power	224 kW (300 fhp) at 2100 rpm (As per ISO:9249)
Maximum torque	1247.8 Nm (127.2 kgm) @ 1400 rpm
Governor	Mechanical
Lubrication system	Forced lubrication, gear pump
Air cleaner	Dry type
Electricals	
Alternator	24V, 100A
Starting motor	24V, 7.5 kW
Battery	2 x 12V, 200 Ah



TRANSMISSION

Torque converter	3-Element, single stage, single phase	
Stall torque ratio	3.23:1	
Transmission	Full powershift planetary gear type Electro hydraulic control valve, 3 forward, 3 reverse	
Speed (Kmph)	Forward	Reverse
	6.67	6.4
	12.9	12.57
	24.75	23.72



STEERING

Type	Centre pivot frame articulation
Steering mechanism	Full hydraulic power steering system, independent of engine speed
Steering pump	Gear pump
Capacity	193 l pm @ 2100 rpm
Steering angle	Wide articulation of 35° on each side
Steering cylinder	Two, double acting type
Bore x Stroke	∅ 110 x 547.5 mm
Relief pressure setting	175 kg/cm ² (17.17 MPa)



BRAKES

Service Brake	4-Wheel, enclosed, air over hydraulically actuated outboard mounted wet disc brakes, independent front & rear brake line
Parking brake	Dry disc type applied on intermediate shaft
Emergency brake	Automatically actuates the parking brake when air pressure goes below the rated value.

STANDARD EQUIPMENT

Engine : Starter, Alternator

Electrical Lights : Front Working Lights (2), Headlights (2), Rear working lights (2).

Brake Lamp & Tail Lamp : Turn indicators (Front & Rear)

GAUGES : Fuel level, Engine oil pressure, Coolant temp, Ammeter, T/C oil temp. Air pressure, RPM Meter, Hour Meter, Transmission oil pressure.

PILOT LAMPS : High beam, Parking brake applied, Turn indicators

CAUTION LAMPS : Battery charging, Trans oil pressure, Engine Oil Pressure Engine Water Temp. Air Pressure

OTHERS : Sight gauges, Dust indicators, Emergency brake, Bucket positioner, Boom kickout, General purpose bucket (4.7cu.m) Suspension seat, Front fender, Floor Mat, Sun visor, ROPS/FOPS cabin, Fire Extinguisher 6 kg, Rear View Mirror, Fan, Seat Belt, Back-up Alarm, Wind Shield Wiper and washer.

OPTIONAL ATTACHMENTS

Air Conditioner

Auto Fire suppression system

Auto Lub System

Heater and defroster

Tyre inflation kit

Pre Heater

TYRES

Front & rear 29.5 x 29-28 PR (L-3)

HYDRAULICS

Main Pump	Tandem gear pump
Capacity	410 l pm @ 2100 rpm
Relief pressure	210 kg/cm ² (20.6 MPa)
Lift cylinder (Boom)	Two, double acting type
Bore x Stroke	∅ 200 x 805 mm
Tilt cylinder	One, double acting type
Bore x Stroke	∅ 225 x 526 mm

Hydraulic cycle time

Raise	6.6 ± 0.5 sec
Dump	2.2 ± 0.1 sec
Lower	4.8 ± 0.2 sec

COOLANT & LUBRICANT REFILL CAPACITY

System	Litres
Engine oil pan	32
Fuel tank	445
Cooling system	80
Brake oil tank	2.4
Hydraulic system	181
Front axle	59
Rear axle	59
Transmission & Torque converter	62

BUCKET CONTROLS

Pilot operated hydraulics required little effort to operate the bucket and boom control lever assuring responsive boom and bucket action. Automatic boom kickout adjustable from horizontal to full lift and automatic bucket positioner adjustable to desired loading angle. No visual spotting required.

Control Positions

Lift arm - Raise, hold, lower and float
Bucket - Tiltback, hold and dump

TURNING RADIUS & ANGLES

Turning radius	8900 mm
Steering angle	35°
Departure angle	25°
Ramp angle	140°
Approach angle	74°

BUCKET RANGE

BUCKET TYPE			BOLT - ON - TEETH		
			HEAVY DUTY	EXCAVATION	STANDARD
# Bucket capacity	SAE rated	Cu.m.	2.8	4.0	4.7
	Struck	Cu. m	2.3	3.4	4.0
Bucket Mass		kg	1750	1800	2050
Static tipping load	Straight	kg	20100	19491	19085
	Full turn	kg	18600	18000	17600
Breakout force (bucket cylinder)		kg	28000	25300	23500
Operating Mass		kg	27700	27750	28000
Bucket width		mm	3380	3510	3510
Dumping clearance, max. height and 45° dump angle	(A) mm		3475	3330	3265
Reach at 2130 mm (7') cut edge clearance and 45° dump angle	(B) mm		2050	2100	2160
Reach at max. height 45° dump	(C) mm		1305	1445	1520
Operating height (fully raised)	(D) mm		5750	5895	6095
Overall length	(E) mm		8890	9085	9185

Optional Bucket of 3.2 cum & 3.5 cum (Heavy duty), 5.0 cum (Light duty) and 6 cum (Extra light duty) capacities are also available.

All dimensions, weights and performance values based on SAE-J732c and J742b standard. Static tipping load and operating weight shown includes lubricants, coolant, full fuel tank, cabin and operator.

Material and specifications are subject to change without notice, Illustrations may include optional equipment & accessories

OPERATING MASS

Operating mass, including rated capacity of lubricants, coolant, fuel, 29.5 x 29-28 PR tyres. 4.7 cu. m SAE heaped capacity bucket : 28,000 kg.

CABIN



Spacious ROPS/FOPS Cabin with door on LH side and with rubber mounting to reduce vibration.

LIFT ARM CONTROL

Z-Bar linkage for high breakout force and easy digging through material. Sealed loader linkage pins with dust seals extend greasing intervals.

AXLES & FINAL DRIVE

Drive system	4 Wheel drive
Front and rear axle	Full floating type
Reduction and differential gear	Spiral bevel gear reduction
Final drive	Planetary gear
Oscillation angle	± 15° (Total 30°)
Wheel tread	2500 mm

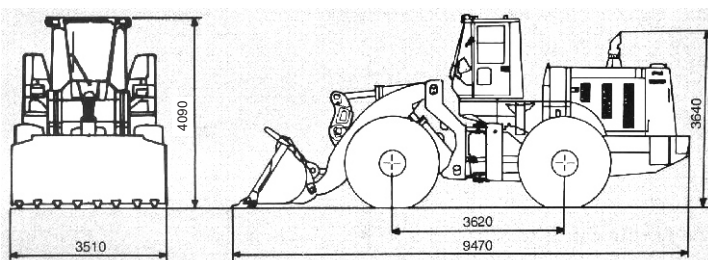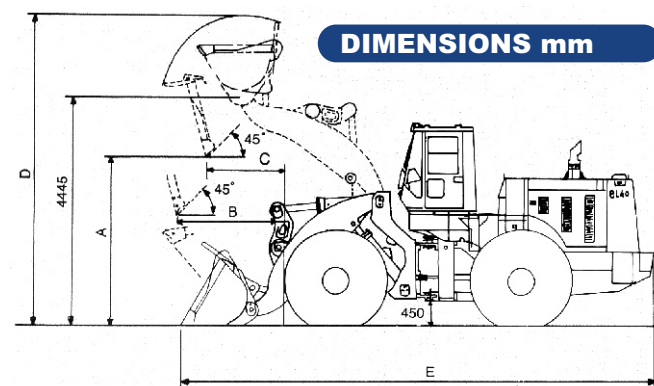

बी ई एम एल लिमिटेड BEML LIMITED

Schedule 'A' Company under Ministry of Defence, Govt. of India

Business Network

Corporate Office

BEML Soudha, 23/1, 4th Main,
S.R. Nagar, Bangalore – 560 027

T + 91 80 22963240, 22963250

F + 91 80 22963278/516/280/164

E-mail: office.cpd@beml.co.in
corpcomm@beml.co.in

International Business Division

Flat No. E,F,G, H, 'Vandana' 11th Floor,
11, Tolstoy Marg, Connaught Place
New Delhi – 110 001

T + 91 11 23316500

F + 91 11 23325085

E-mail: mx@beml.co.in

Marketing Division

5th Floor, Unity Building,
J.C. Road, Bangalore – 560 002

T + 91 80 22963501/02/07/510/540

F + 91 80 22963541

E-mail: m@beml.co.in
mmd@beml.co.in

REGIONAL OFFICES

Bangalore

4th Floor, Unity Building, J. C. Road,
Bangalore - 560 002
Karnataka

T + 91 97413 51588

E-mail: mg@beml.co.in

Bilaspur

1-A, Industrial Area, Sector-C, Sirgitti,
Bilaspur - 495 223.
Chhattisgarh

T + 91 7752 252745, 252598

F + 91 7752 252065

E-mail: mv@beml.co.in

Neyveli

F-4, Dr. Rajendraprasad Road,
Block-27, Neyveli, - 607 803
Tamil Nadu

T/F + 91 4142 268517

T + 91 4142 265517 / 229392

E-mail: ma@beml.co.in

Dhanbad

Mouza - Kangalo, Amaghata,
Govindpur, KG Ashram Post, Dhanbad
Jharkhand - 828 109

T + 91 94711 92023

E-mail: mf@beml.co.in

Hyderabad

3-6-114, Street No.18, Himayat Nagar,
Hyderabad - 500 029
Telangana

T + 91 40 2322 7032 / 94907 93117

F + 91 40 23221794

E-mail: rm.hyderabad@beml.co.in

Kolkata

35/1A, Taratala Road,
Kolkata - 700 088.
West Bengal

T + 91 33 2401 5286 / 87 / 98 / 99

F + 91 33 2401 5288

E-mail: rm.kolkata@beml.co.in

Mumbai

32A, Bazar Road,
Near Jain Mandir, Bandra (West), Mumbai,
Maharashtra - 400 050

T + 91 22 26431875 / 26435875

F + 91 22 26423928

E-mail: rm.mumbai@beml.co.in

Nagpur

No 33, Cement Road,
Shivaji Nagar,
Nagpur - 440 010, Maharashtra.

T + 91 712 2248435 / 2248343

F + 91 712 2249997

E-mail: mn@beml.co.in

New Delhi

Flat E,F,G,H, 'Vandana', 11th Floor,
11, Tolstoy Marg, Connaught Place,
New Delhi - 110 001

T + 91 11 2344 3511 / 3528 / 2331 6500

F + 91 11 2332 5085

E-mail: ml@beml.co.in

Ranchi

206/D-1, Bhagirathi, (Behind NCC Campus)
Rameshwaram Colony, Bariatu Road,
Ranchi, Jharkhand - 834 009

T + 91 651 2540710 / 94311 08531

E-mail: mr@beml.co.in

Sambalpur

BEML Complex, NH-6, Panchagachhia,
Baraipalli Post, Sambalpur 768 006
Odisha.

T + 91 663 2521604 / 2521389

E-mail: mb@beml.co.in

Singrauli

PB No. 5, Jhingurdha Colliery,
Singrauli - 486 889
Madhya Pradesh.

T + 91 7805 272668 / 272318

F + 91 7805 272282

E-mail: rm.singrauli@beml.co.in

ACTIVITY CENTRES

Bhopal

Ground Floor, Hall No.1, Chittod Complex, Zone-1,
Maharanapratap Nagar (MP Nagar), Bhopal - 462 011

T + 91 755 2550711 / 8989459753

Panjim

BEML Limited, 5/4, Victor Building, Fontanhas, Mala,
Panjim - 403 001, Goa

T + 91 832 2225135 / 77986 87178

Itanagar

C/o. Tobom Riba, H-Sector, Papum
Itanagar - 791 113, Arunachal Pradesh

T + 91 94029 34205 / 88372 15852

Kochi

No. 39/2122, Chittoor Road, Emakulam South,
Kochi - 682 016

T + 91 484 2375138

E-mail: rm.kochi@beml.co.in

Maihar

Maihar, Madhya Pradesh

Mob: +91 79875 53768

Silapathar: Surya Vatika, Amritpur, Silapathar, Assam - 787 059 T + 91 95311 29059

DISTRICT OFFICES

Ahmedabad

99/100, BEML HOUSE, 2nd Street,
Azad Society, Ambawadi,
Ahmedabad - 380 015, Gujarat

T + 91 79 26445523 / 94264 13620

F + 91 79 26423950

E-mail: rm.ahmedabad@beml.co.in

Asansol

3, Bumpur Road,
Asansol - 713 304
West Bengal

T + 91 341 2252480

F + 91 341 2250601

E-mail: mca@beml.co.in

Bacheli

Behind Central Stores of NMDC Ltd.,
Depot 5, Bacheli - 494 553.
Chhattisgarh

T/F + 91 7857 230005

E-mail: rm.bacheli@beml.co.in

Bhilai

Room no 22/C, BSP Expansion Building,
Near Ispat Bhavan, Bhilai 490 001, Chhattisgarh

T + 91 788 2223880

F + 91 788 2221652

E-mail: mnb@beml.co.in

Bhubaneswar

252/A, Lewis Road
Bhubaneswar - 751 014
Odisha

T + 91 674 2434427 / 99373 83950

E-mail: mbb@beml.co.in

Chandrapur

Mamidwar, Tiles Factory Compound
Ghugus Road, Padoli
Chandrapur - 442 406 Maharashtra

T + 91 7172 287230

F + 91 7172 287560

E-mail: mnc@beml.co.in

Chennai

Flat No. 10, Supriya Estates,
No.3, Sterling Road, Nungambakkam,
Chennai - 600 034, Tamil Nadu,

T + 91 44 28220844

F + 91 44 28257319

E-mail: rm.chennai@beml.co.in

Guwahati

No.11, Ward 43, Hengrabani Road,
Ganesh Puri, Dispur,
Guwahati - 781 006 Assam

T + 91 361 2232966

F + 91 361 2232967

E-mail: rm.guwahati@beml.co.in

Hospet

No.1431, Manjunatha Complex,
Bhagat Singh Nagar, Opp. KSSIDC Indl. Estate,
Dam Road, Hospet - 583 203, Karnataka

T/F + 91 8394 230172

E-mail: rm.hospet@beml.co.in

Jammu

62C, Block D/C, Gandhi Nagar,
Jammu tawi - 180 004
Jammu and Kashmir

T + 91 191 2459 437

F + 91 191 2430 447

E-mail: mlj@beml.co.in

Kothagudem

Old Project Planning Department,
Near SCCL Corporate Office,
Kothagudem - 507 101, Telangana

T + 91 8744 245572

F + 91 8744 245530

E-mail: rm.kothagudem@beml.co.in

Leh

174-B, (Near Royal Enfield Showroom),
Housing Colony, Leh, Ladakh -194 101

T + 91 1982 258828 / 94198 71008

E-mail : mll@beml.co.in

Ramagundam

Near SCCL TTC, Jawahar Nagar,
Behind CISF Camp, Godavarikhani - 505 209.
Peddapalli Dist., Telangana

T + 91 8728 248299 / 94408 58441

E-mail: mhr@beml.co.in

Udaipur

20-B, Uchhab Bhavan, Bedla Road,
Fatehpura, Udaipur - 313 001.
Rajasthan

T + 91 294 2452054

E-mail: mww@beml.co.in

Visakhapatnam

No. 8-45-11, 4th Lane,
Vidyanagar Chinna Waltair Colony
Visakhapatnam - 530 003, Andhra Pradesh

T/F + 91 891 2754608 / 83320 54590

E-mail : rm.vizag@beml.co.in

www.bemlindia.in

Represented by:

बी ई एम एल लिमिटेड BEML LIMITED

Schedule 'A' Company under Ministry of Defence, Govt. of India