

BD30W-1

W H E E L D O Z E R



Salient Features :

- | Productivity
- | Reliability
- | Manoeuverability
- | Serviceability & Maintainability
- | Comfort
- | Electronic Monitoring System



Blade Capacity	: 5.9m ³
Operating Mass	: 30,000 kg
Net Power	: 224 kW (300 fhp) @ 2100 rpm

BD30W-1

www.bemlindia.com

BD30W-1 WHEEL DOZER

Salient Features :

Productivity:

High power engine, rugged transmission featuring 3 forward and 3 reverse speeds, heavy duty planetary axle for high tractive effort and gradeability at all operating conditions.

Reliability:

Attention free wet multiple disc brakes for front and rear axles, and box type chassis for uniform stress distribution. The cutting edges, end bits, pins and bushings are highly reliable and durable.

Manoeuvrability:

Articulation with power steering, optimum combination of travel speed, turning radius and wheel base ensures very high level of manoeuvrability..

Serviceability & Maintainability:

Electronic display and monitoring system helps to prevent minor problems from becoming major ones.

Comfort:

Roomy walk-through cab, with ergonomically arranged manually operated control lever for speeds in forward / reverse selections, cushioned suspension adjustable seat and excellent visibility assures easy dozing and leveling.

Electronic Monitoring System:

The EMS is designed to monitoring the health of the equipment and to provide an audio visual warning to prevent equipment breakdown through early detection. The entire operator controls, warning displays and control switches are fitted on a FRP dashboard with a high degree of ergonomics and comfort. Besides gauge and electronic hour meter, other warning parameters are monitored to provide audio-visual signal. Also a "SYSTEM CHECK" facility stimulates all faults together to check proper functioning of the electronic unit and warning lamp assemblies.



ENGINE

Make	BEML
Model	BS6D140-1
Type	Diesel, 4 cycle, Water cooled, Direct injection
Aspiration	Turbo charged
Net Power	224 kW (300 fhp) @2100 rpm
Maximum Torque	1247.8 Nm (127.2 kgm) @ 1400 rpm
No. of cylinders	6
Bore x Stroke	ø 140 x 165 mm
Piston Displacement	15.24 l
Compression ratio	15.0:1
Governor	Mechanical
Lubrication system	Forced lubrication, gear pump
Air cleaner	Dry type
Electricals	
Alternator	24 V / 100 A
Starting motor	24 V / 7.5 kW
Battery	2 x 12 V / 200 Ah



TRANSMISSION

TORQUE CONVERTER			
Type	3 element, single stage single phase		
Transmission			
Type	Full power shift planetary gear		
Gear	3 F / 3R		
Stall torque ratio	3.23 : 1		
Max. Drawbar pull	31,000 kg		
Travel speeds (km/h)			
Gear	1st	2nd	3rd
Forward	6.67	12.9	24.75
Reverse	6.4	12.57	23.72



DRIVE & AXLES

Drive System	Four wheel drive
Front & rear axle	Full floating type
Reduction & Differential gear	Spiral bevel gear reduction
Final Drive	Planetary gear
Oscillating angle	15° both sides



FILTRATION

Engine fuel & oil	Full flow spin-on type
Air	Double element, dry type with pre-cleaner and auto dust ejector
Transmission	Pressure line filter
Hydraulic steering & Braking	Return line filter

STANDARD ACCESSORIES

Engine : Starter , Alternator

Lights : Head lights, Rear working lights, Turn indicators (front & rear) ,Stop & tail lamp, Back-up lamp

Gauges : Fuel level, Engine oil pressure, Coolant temperature, T/M oil temperature, RPM Meter, Trans oil pressure, Ammeter, Air pressure, Hour meter

Pilot Lamps : High beam , Turn indicators

Caution Lamps : Engine oil pressure ,Transmission oil pressure, Air Pressure, Coolant temperature, Parking brake applied, Battery charging .

Others : ROPS cabin, Wind shield wiper & washer, Tool kit, Dust indicator, Parking and emergency brake, Tyres 29.5 x 29-28PR(L-3) , Straight blade (5.9 m), Fire Extinguisher-5 kg, Back-up alarm, Sight gauge. Seat belt, Floor mat, Sun visor, Fan, Rear view mirror, Roof lamp.

OPTIONAL ACCESSORIES

ROPS Canopy, Steel cabin, Air conditioners, Heater, Defroster, Fire Extinguisher- 2kg, Canopy, Tyre inflation kit, Pre- heater



HYDRAULIC SYSTEM

Hydraulic Pump

Main pump	Gear Pump
Capacity	410 ℓ / min @ 2100 rpm
Relief Pressure	13.73 MPa (140 kg/cm ²)
Cylinders :	
Lift Cylinder	Two, Double acting type
Bore x Stroke	ø 140 x 990 mm
Tilt	One, Double acting type
Bore & Stroke	ø 225 x 160 mm



STEERING

Type	Center pivot frame articulation
Steering	Full hydraulic power steering system mechanism independent of engine speed
Steering pump	Gear pump
Capacity	193 ℓ / min @ engine 2100 rpm
Relief pressure	17.2 MPa (175 kg / cm ²)
Steering angle	Wide articulation of 30° on each side
Turning radius	9400 mm (outer tip blade)
Steering cylinders	2, double acting type
Bore x Stroke	ø 110 x 547.5 mm



BRAKES

Service Brakes	4 wheel, enclosed, air over hydraulically actuated, outboard mounted, wet multiple disc brakes, independent front & rear brakes.
Parking brake	Dry disc type applied on intermediate drive shaft
Emergency brake	Automatically actuates the parking brake when the air pressure goes below the rated value





COOLANT & LUBRICANTS CAPACITY (Refill)

System	Capacity (in ℓ)
Engine oil pan	32
Fuel Tank	445
Cooling System	80
Hydraulic System	181
Front Axle	59
Rear Axle	59
Brake oil tank	1.5
Transmission & torque converter	62



DIMENSIONS

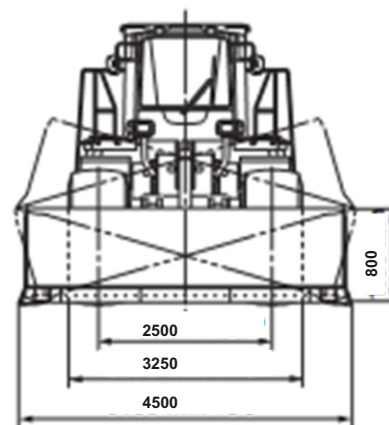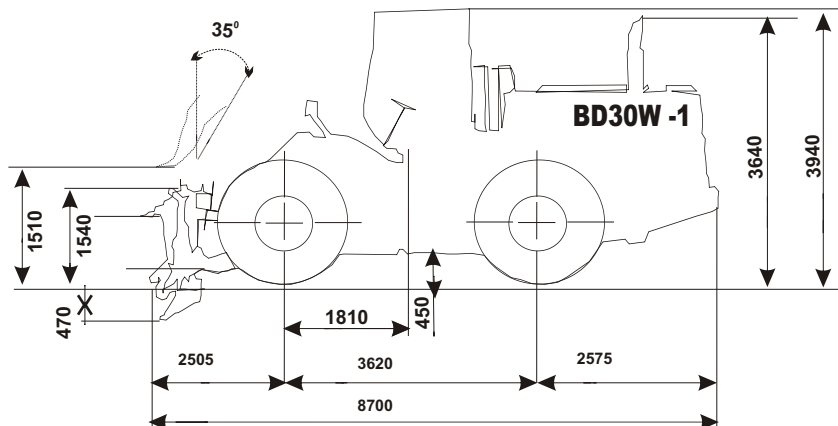

BLADE

A large capacity 5.9 m³ blade results in higher and fast production while dozing stock piled material and general earth moving. The complete unit consists of blade, push arms, trunion mounting, reversible cutting edges and hydraulic lift and tilt cylinders. Mono lever at operator's right to control dozer, lift & tilt.

Blade Controls :

Minimum effort is required to operator the blade control mono-lever assuring responsive smooth blade action.

Control Positions :

Blade lift	Raise, hold, lower and float
Blade tilt	Tilt left, hold, tilt right



OPERATING PARAMETERS

Blade type	Straight
Blade Capacity	5.9 m ³
Blade width (over end bits)	4500 mm
Blade height	1540 mm
Max. lift above ground	1510 mm
Max depth of cut	470 mm
Max. Tilt adjustment	800 mm
Min ground clearance	450 mm



OPERATING MASS

Operating mass : 30,000 kg
(Including rated capacity of lubricant, coolant, fuel, 29.5 x 29-28 PR, 5.9 m³ capacity blade and the standard equipment)



CABIN

Roomy walk-through cab, with ergonomically arranged manually operated control lever for speeds in forward / reverse selections, cushioned suspension adjustable seat and excellent visibility assures easy dozing and leveling.



TYRE

Front & Rear 29.5 x 29 - 28 PR

Material and specifications are subject to change without notice, Illustrations may include optional equipment & accessories

BD30W-1

WHEEL DOZER

TECHNICAL SPECIFICATIONS

बी ई एम एल लिमिटेड

BEML LIMITED

A Govt. of India Miniratna Company Under Ministry of Defence

Business Network

Corporate Office

BEML Soudha, 23/1, 4th Main,
S.R. Nagar, Bangalore-560 027

T + 91 80 22963240, 22963250

F + 91 80 22963278/516/280/164

E-mail: office@cpd.beml.co.in
office@pr.beml.co.in

International Business Division

BEML Soudha, 23/1, 4th Main,
S.R. Nagar, Bangalore-560 027

T + 91 80 22222730, 22233350
22963187, 22963215

F + 91 80 22224874

E-mail: office@export.beml.co.in

Marketing Division

5th Floor, Unity Building,
J.C. Road, Bangalore-560 002

T + 91 80 22963501/02/07/510/553

F + 91 80 22963541

E-mail: m@beml.co.in
bemldealer@dealer.beml.co.in

Global Service HQ

C-6, Central Hingna Road,
MIDC Industrial Area, Hingna,
Nagpur-440 028

T + 91 7104 287097/287098

F + 91 7104 287099

E-mail: ss.servicehq@gmail.com
ss@servicehq.beml.co.in

REGIONAL OFFICES

Bangalore

No -23/1, Haudin Road Cross,
Ulsoor Road, Bangalore - 560008
Karnataka

T + 91 080 22963590/92/93/94
F + 91 080 2558156
E-mail: mg@beml.co.in

Bilaspur

1/A, Sector-C, Sirgitti Industrial Area,
P.O: Tifra, Bilaspur - 495 223.
Chhattisgarh.

T + 91 7752 252745, 252598
F + 91 7752 252065
E-mail: bilaspur@rm.beml.co.in

Chennai

Flat No. 10&11, Supriya Estates,
Sterling Road, Nungambakkam,
Chennai - 600 034, Tamil Nadu

T + 91 44 28276576 / 28220844
F + 91 44 28257319
E-mail: chennai@rm.beml.co.in

Dhanbad

Kamal Kunj, Kola Kusuma,
Saraidhela, Dhanbad - 828 127
Jharkhand

T + 91 326 2200180 / 2208982/5827
F + 91 326 2200182
E-mail: dhanbad@rm.beml.co.in

Hyderabad

3-6-114, Himayat Nagar,
Hyderabad - 500 029
Andhra Pradesh

T + 91 40 23225250 / 7032 / 2166
F + 91 40 23221794
E-mail: hyderabad@rm.beml.co.in

Kolkata

35/1, Taratalia Road,
Kolkata - 700 088.
West Bengal

T + 91 33 24015286 / 87 / 98 / 99
F + 91 33 24015288
E-mail: kolkata@rm.beml.co.in

Mumbai

C/o Richardson & Cruddas (1972) Ltd.
3rd Floor, Corporate Office Building
Sir J.J Road Byculla, Mumbai - 400 020

T + 91 22 23781457 / 23781382
F + 91 22 23780915
E-mail: mumbai@rm.beml.co.in

Nagpur

33, Cement Road,
Shivaji Nagar,
Nagpur - 440 010, Maharashtra.

T + 91 0712 2248435 / 2248343
F + 91 0712 2249997
E-mail: nagpur@rm.beml.co.in

New Delhi

Flat EFGH, 'Vandana', 11th Floor,
Tolstoy Marg,
New Delhi - 110 001

T + 91 11 23310035 / 23316500
F + 91 11 23325085
E-mail: delhi@rm.beml.co.in

Ranchi

206/D-1, Bhagirathi, (Behind NCC Campus),
Rameshwaram Colony, Bariatu Road,
Ranchi, Jharkhand - 834009

T + 91 651 2540710 / 2540791
F + 91 651 2540624
E-mail: ranchi@rm.beml.co.in

Sambalpur

BEML Complex, NH-6, Baraipalli,
Sambalpur - 768 150
Orissa.

T + 91 663 2521604 / 2520393
F + 91 663 2521603
E-mail: sambalpur@rm.beml.co.in

Singrauli

PB No. 5, Jhingurdha Colliery,
Sidhi, Singrauli - 486 889
Madhya Pradesh.

T + 91 7805 268260 / 266668
F + 91 7805 267282 / 318
E-mail: singrauli@rm.beml.co.in

DISTRICT OFFICES

Ahmedabad

266-1, Dilbaug Villa,
Darshan Society Road, Navrangpura,
Ahmedabad - 380 009. Gujarat

T + 91 79 26445523
F + 91 79 26423950
E-mail: ahmedabad@rm.beml.co.in

Asansol

3, Bumpur Road,
Asansol - 713 304
West Bengal

T + 91 341 2252480
F + 91 341 2250601
E-mail: asansol@rm.beml.co.in

Bacheli

Behind Central Stores
of NMDC Ltd., Depot 5, Bacheli - 494 553.
Chhattisgarh

T + 91 7857 200518
F + 91 7857 230005
E-mail: bacheli@rm.beml.co.in

Bhopal

Ground Floor, Hall No.1, Chittod Complex
Zone-1, Maharanapratap Nagar (MP Nagar)
Bhopal - 462 023

T + 91 755 2550711
E-mail: bemlbhopal@gmail.com

DISTRICT OFFICES

Bhubaneswar

252/A, LEWIS Road,
Bhubaneswar - 751 014
Orissa

T + 91 674 2434428
T/F + 91 674 2434427
E-mail: bhubaneswar@rm.beml.co.in

Chandrapur

Mamidwar, Tiles Factory Compound,
Ghugus Road, Padoli,
Chandrapur - 442 406 Maharashtra

T + 91 7172 287230
F + 91 7172 287072
E-mail: chandrapur@rm.beml.co.in

Cochin

No. 55/845, Chittor Road, Ernakulam South
Cochin-682 016

T + 91 484 2375138
E-mail: bemlkochi@gmail.com

GOA

67-12, Dattaprasad Building, 3rd Floor, MG road
Timphoni School, Panjim, - 403001, Goa

T + 91 832 2225135
E-mail: goa@rm.beml.co.in

Guwahati

Hegrabari Road, House No. 11,
Ganesh Puri, Dispur,
Guwahati - 781 006 Assam

T + 91 361 2232966
F + 91 361 2232967
E-mail: guwahati@rm.beml.co.in

Hospet

No. 1431, Manjunatha Complex, New Ward No. 31,
Bhagat Singh Nagar, Opp. KSSIDC Indl. Estate,
Dam Road, Hospet - 583 203, Karnataka

T + 91 8394 230173
F + 91 8394 230172
E-mail: hospet@rm.beml.co.in

Jammu

62C, Block D/C, Gandhi Nagar,
Jammu tawi - 180 004
Jammu and Kashmir

T + 91 191 2430447
F + 91 191 2477469
E-mail: jammu@rm.beml.co.in

Kothagudem

Old Project Planning Department,
Near SCCL Corporate Office,
Kothagudem - 507 101, Andhra Pradesh

T + 91 8744 245572
F + 91 8744 245530
E-mail: kothagudem@rm.beml.co.in

LEH

#135, Fort Road, Sheynam
LEH, Ladakh, 194 101

T + 91 9622973460
E-mail: bemlleh@gmail.com

Madurai

9-4/49, Kalai Nagar, IInd Main Road,
Madurai - 625 017, Tamil Nadu.

T/F + 91 452 2649458
E-mail: madurai@rm.beml.co.in

Neyveli

F-4, Rajendraprasad Road, Block-27
Neyveli - 607 803, Tamil Nadu

T/F + 91 4142 268517
E-mail: neyveli@rm.beml.co.in

Panjim

67-12, Dattaprasad Building, III Floor, MG Road,
Timphoni School, Panjim - 403 001, Goa

T/F 91 832 2225135
E-mail: goa@rm.beml.co.in

Ramagundam

Opp. SCCL 11A Mines, Manthani,
(PO) Jallaram, GK - 505 184
Karimnagar Dt. Andhra Pradesh

T + 91 8728 248299
F + 91 8728 247423
E-mail: ramagundam@rm.beml.co.in

Udaipur

20-B, Uchhab Bhawan, Bedia Road,
New Fatehpura, Udaipur - 313 001.
Rajasthan

T + 91 294 2452053, 2452055
F + 91 294 2452054
E-mail: udaipur@rm.beml.co.in

Vijayawada

District Manager : Mr Rambabu

Mob +91 8330930990

Visakhapatnam

No. 8-45-11, 4h Lane, China Waltair Colony,
Visakhapatnam - 530 003

T/F 0891 2754608
E-mail: vizag@rm.beml.co.in

www.bemlindia.com

Represented by :

बी ई एम एल लिमिटेड

BEML LIMITED

A Govt. of India Miniratna Company Under Ministry of Defence