


MACHINING DEVIATIONS FOR LINEAR DIMENSIONS	RANGE	0 - 6	6 - 30	30 - 120	120 - 315	315-1000	1000-2000	2000-4000	ABOVE 4000	RA
	TOLERANCE	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2	±3	~
FOR DIMENSIONAL TOLERANCES OF SHEET METAL PARTS AND WELDED STRUCTURES, REFER STD. RD-227										
UNSPECIFIED TOLERANCE FOR LINEAR AND ANGULAR DIMENSIONS REF. IS 2102 (PT-1) (MEDIUM)							QUALITY OF WELD JOINTS REF, RD 230 MEDIUM			
VALUES OF SURFACE TEXTURE SHALL BE AS PER COMPANY STD DS. 1012.C.						STATUS:				
WELDING SHALL BE CARRIED OUT AS PER IS: 9595-96										

CABLE MARKER PROTECTIVE BOX/LABEL HOLDER

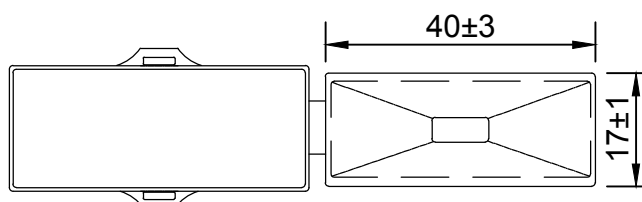

TECHNICAL REQUIREMENTS:

1. TYPE : POLYETHYLENE/POLYPROPYLENE,
HALOGEN FREE.
2. OPERATING TEMPERATURE : -40°C TO +80°C.
3. COLOUR : TRANSPARENT.
4. FIRE SAFETY PERFORMANCE : EN45545-2(HL3)

UN CONTROLLED COPY

NOTE : PROTECTIVE BOX/LABEL HOLDER SHALL BE DUST PROOF.

[illegible]