


FOR DIMENSIONAL TOLERANCES OF SHEET METAL PARTS AND WELDED STRUCTURES, REFER STD. RD-227		
UNSPECIFIED TOLERANCE FOR LINEAR AND ANGULAR DIMENSIONS REF. IS 2102 (PT-1) (MEDIUM)	QUALITY OF WELD JOINTS REF, RD 230 MEDIUM	
VALUES OF SURFACE TEXTURE SHALL BE AS PER COMPANY STD DS. 1012.C.	STATUS:	
WELDING SHALL BE CARRIED OUT AS PER IS: 9595-96		

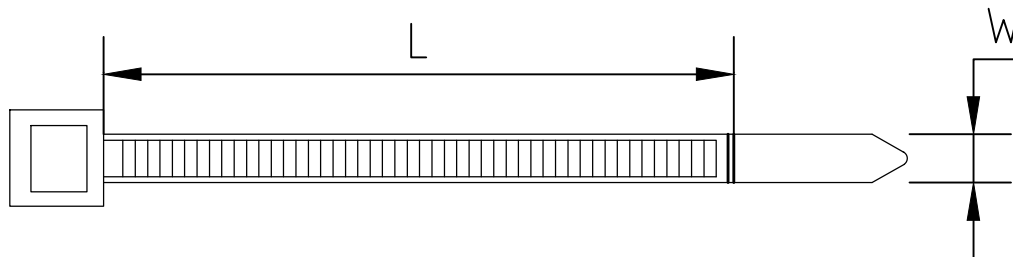

UNCONTROLLED

1. MATERIAL: UL APPROVED NYLON-66
2. COLOUR: BLACK
3. FLAMMABILITY: AS PER UL 94 V0
4. WITH LOCKING & UNLOCKING FACILITY.

SCOPE OF SUPPLY

SL.NO.	DESCRIPTION	DIM in mm	
		LENGTH (L)	WIDTH (W)
1	FIRE RETARDANT CABLE TIE	540	12.7

[illegible]

A schematic diagram of a cantilever beam of length L . The beam is fixed at the left end and free at the right end. A downward point load W is applied at the free end.

UNCONTROLLED


1. MATERIAL: UL APPROVED NYLON-66
2. COLOUR: BLACK
3. FLAMMABILITY: AS PER UL 94 V0

SL.NO.	DESCRIPTION	DIM in mm	
		LENGTH (L)	WIDTH (W)
1	FIRE RETARDANT CABLE TIE	100	2.5



BEML LIMITED

FOR DIMENSIONAL TOLERANCES OF SHEET METAL PARTS AND WELDED STRUCTURES, REFER STD. RD-227		
UNSPECIFIED TOLERANCE FOR LINEAR AND ANGULAR DIMENSIONS REF. IS 2102 (PT-1) (MEDIUM)	QUALITY OF WELD JOINTS REF, RD 230 MEDIUM	
VALUES OF SURFACE TEXTURE SHALL BE AS PER COMPANY STD DS. 1012.C.	STATUS:	
WELDING SHALL BE CARRIED OUT AS PER IS: 9595-96		

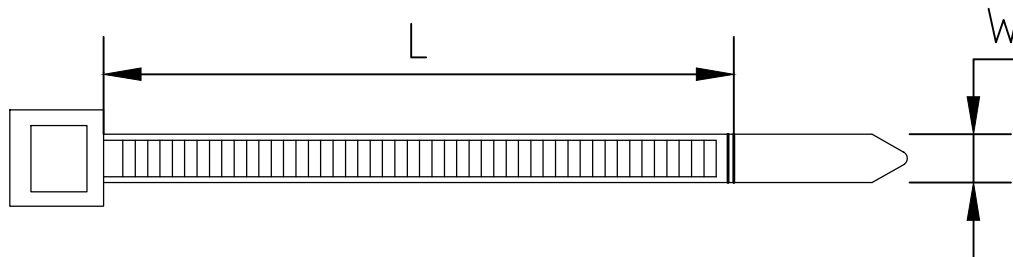

UNCONTROLLED

1. MATERIAL: UL APPROVED NYLON-66
2. COLOUR: BLACK
3. FLAMMABILITY: AS PER UL 94 V0

SCOPE OF SUPPLY

SL.NO.	DESCRIPTION	DIM in mm	
		LENGTH (L)	WIDTH (W)
1	FIRE RETARDANT CABLE TIE	140	3.6

[illegible]

FOR DIMENSIONAL TOLERANCES OF SHEET METAL PARTS AND WELDED STRUCTURES, REFER STD. RD-227		
UNSPECIFIED TOLERANCE FOR LINEAR AND ANGULAR DIMENSIONS REF. IS 2102 (PT-1) (MEDIUM)	QUALITY OF WELD JOINTS REF, RD 230 MEDIUM	
VALUES OF SURFACE TEXTURE SHALL BE AS PER COMPANY STD DS. 1012.C.	STATUS:	
WELDING SHALL BE CARRIED OUT AS PER IS: 9595-96		




1. MATERIAL: UL APPROVED NYLON-66
2. COLOUR: BLACK
3. FLAMMABILITY: AS PER UL 94 V0

UNCONTROLLED

SCOPE OF SUPPLY

PART / STOCK No.					DESCRIPTION			SIZE		COMPANY STD./I.S		Wt. (Kg)		
										MATERIAL				
					PRODUCT	METRO CARS								
					REF DRG									
					MATERIAL	NYLON-66								
					HEAT TREAT.					APPD	C R NAGARAJ		07.11.2013	
					SURFACE TREAT.					REVD	C R NAGARAJ		07.11.2013	
					TITLE	CABLE TIE (200mm X 4.8mm)				CHKD	K NAGARAJ		07.11.2013	
DRWN	ARJUN		07.11.2013											
SCALE			SHEET	Wt.(Kg)										
NTS			1 OF 1	0										
 NEW FRONTIERS. NEW DREAMS					DRG No.							ALT		
					91821923									

FOR DIMENSIONAL TOLERANCES OF SHEET METAL PARTS AND WELDED STRUCTURES, REFER STD. RD-227		
UNSPECIFIED TOLERANCE FOR LINEAR AND ANGULAR DIMENSIONS REF. IS 2102 (PT-1) (MEDIUM)	QUALITY OF WELD JOINTS REF, RD 230 MEDIUM	
VALUES OF SURFACE TEXTURE SHALL BE AS PER COMPANY STD DS. 1012.C.	STATUS:	
WELDING SHALL BE CARRIED OUT AS PER IS: 9595-96		

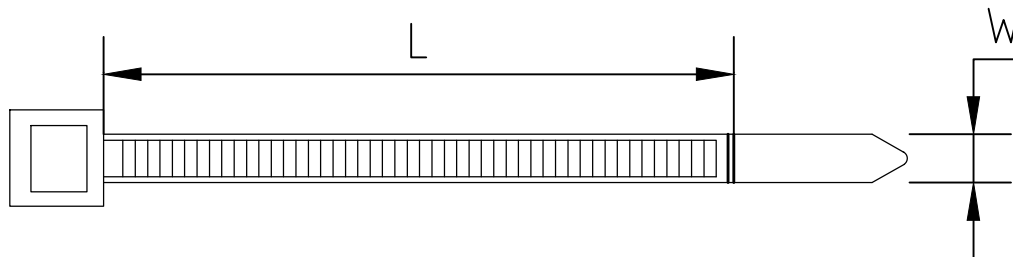

UNCONTROLLED

1. MATERIAL: UL APPROVED NYLON-66
2. COLOUR: BLACK
3. FLAMMABILITY: AS PER UL 94 V0

SCOPE OF SUPPLY

SL.NO.	DESCRIPTION	DIM in mm	
		LENGTH (L)	WIDTH (W)
1	FIRE RETARDANT CABLE TIE	370	4.8

[illegible]