

KEY W/UT TO ACCOMODATE
STAR WASHER LOCKING

4MM GRUB SCREW FOR LOCKING
WITH DRAWAL NUT

NOTE DESCRIPTION DETAILS OF LIFTING
HOOK AND ROPE PULLEY


1 LIFTING HOOK:- STANDARD TRAPEZODIAL
CROSS SECTIONAL SHANK HOOK AS PER
IS 8815-1969 MADE OUT OF FORGED STEEL
MATERIAL EN-3 AS PER IS 1875-1966

2 250 ROOT DIA ROPE PULLIES TO ACCOMODATE 13MM
DIA STEEL WIRE ROPE MADE OUT OF CAST
STEEL AS PER GR-I IS 1030

19	HOOK LATCH		1
17	LOCKING WASHER MB II		2
16	WITHDRAWAL NUT KM-II		2
15	M-10X 26 MM LONG BOLT WITH NUT & SPRING WASHER	M.S. SER ST	12
14	M10X 20MM LONG BOLTS WITH SPRING WASHER	M.S. SER ST	2
13	M10 DIA GREASE NIPPLE	M.S	2
12	THRUST BEARING NO 5110 SKF/AG		1
11	RADIAL BEARING NO 6012 SKF/FAG		4
10	PULLEY GUARD	M.S	2
9	CIRCLIP (C-RING)		2
8	SPACER	M.S	4
7	BEARING COVER	M.S	4
6	LOCKING PLATE FOR PULLEY GUARD	M.S	2

DRAWING NO: ESE 152 R1-CR
BEARING MAKE SPECIFIED

NOTE 1, MANUFACTURES TEST CERTIFICATE TO BE
PRODUCED FOR HOOK AND PULLEY HARDNESS
2. THE HOOK BLOCK TO BE SUPPLIED IN
COMPLETE ASSY WITH HOOK LATCH
3. THE HOOK TO BE PAINTED IN BLACK

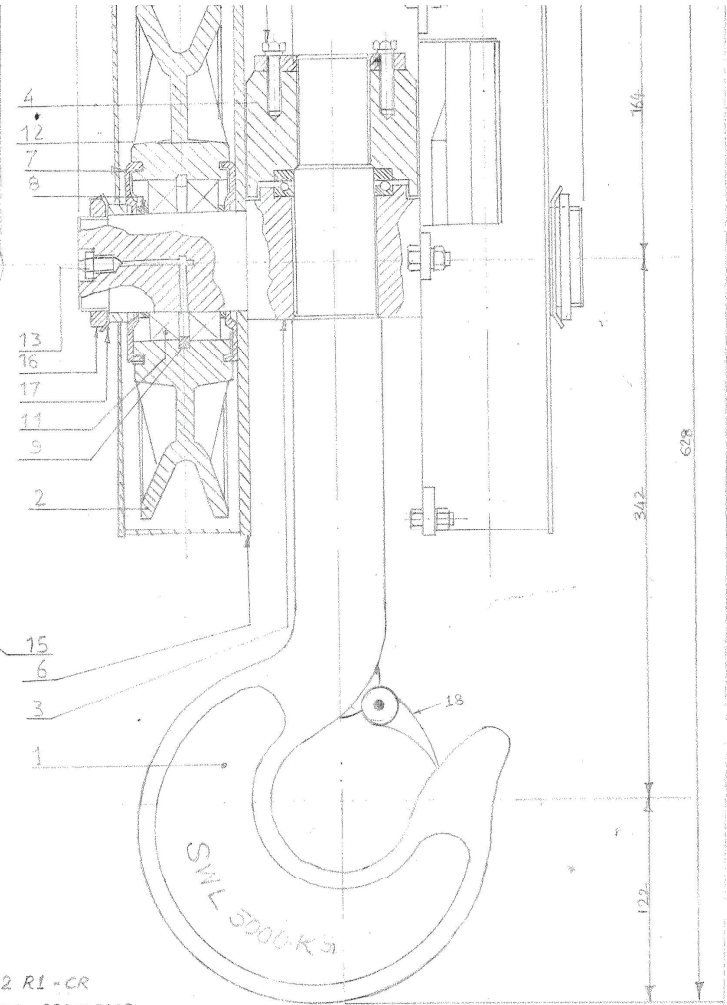

ALL DIMENSIONS ARE IN MM

PRODUCT		USED IN		QTY.

W/INK: SCALE